PHOTOMETRIC REPORT

LUMINAIRE SCHEDULE										
SYMBOL	QTY	LABEL	ARRANGEMENT	MANUFACTURER	CATALOG NUMBER	MOUNTING	EMERGENCY	LLF	LUMINAIRE LUMENS	LUMINAIRE WATTS
	3	S1	Single	U.S. ARCHITECTURAL LIGHTING	VLL-PLED-IV-FT-40LED-1225mA-40K-HS	POLE MOUNTED: 25' A.F.G.	N/A	0.900	14084	158.9
	1	S2	Single	U.S. ARCHITECTURAL LIGHTING	VLL-PLED-IV-FT-40LED-1225mA-40K	POLE/WALL MOUNTED: 25' A.F.G.	N/A	0.900	17938	158.9
	2	S3	Single	U.S. ARCHITECTURAL LIGHTING	VLL-PLED-159W-III-W-40LED-1225mA-40K-HS	POLE MOUNTED: 25' A.F.G.	N/A	0.900	14123	158.9
	3	W2	Single	U.S. ARCHITECTURAL LIGHTING	VLL-PLED-IV-FT-40LED-525mA-40K	WALL MOUNTED: 16' A.F.G.	N/A	0.900	9340	64.8

CALCULATION SUMMARY										
LABEL	CALC TYPE	UNITS	SPACING L-R (FT)	SPACING T-B (FT)	HEIGHT (FT)	AVG	MAX	MIN	AVG/MIN	MAX/MIN
PROP_LINE	Illuminance	Fc	8	N.A.	N.A.	0.24	2.0	0.0	N.A.	N.A.
SITE	Illuminance	Fc	8	8	0	2.16	5.6	1.1	1.96	5.09

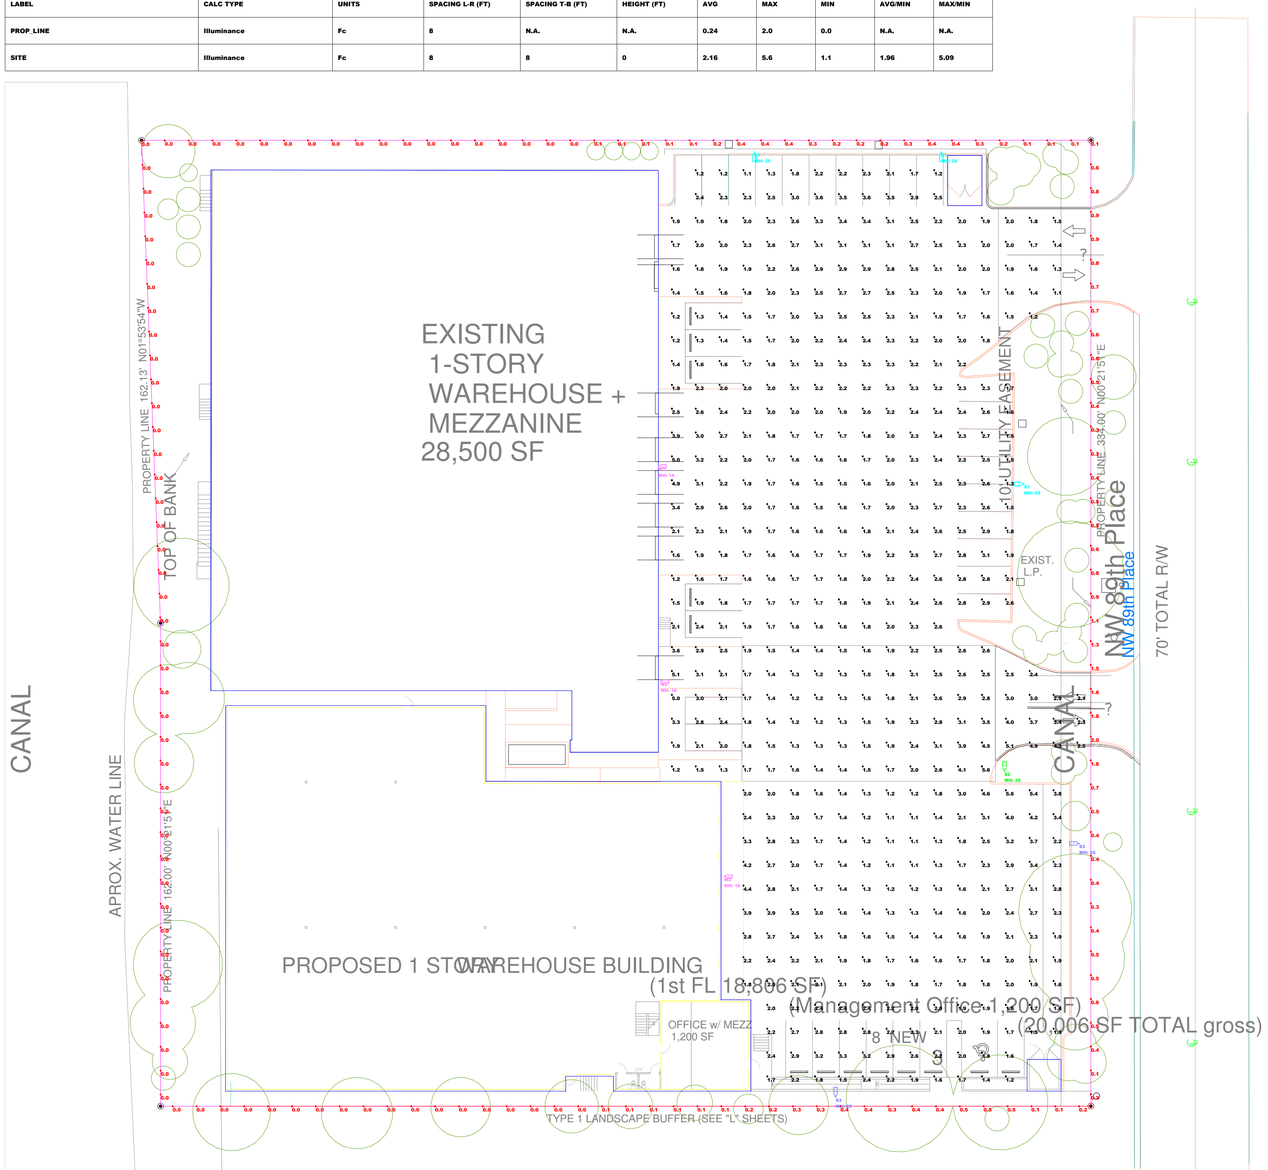

Scale: 1 inch= 24 Ft.

DESCRIPTION:
SITE
NORMAL POWER

DATE:
10/7/2025

REV# 01

PROJECT:
2020 NW 89TH PLACE - DORAL STORAGE

Power & Lighting Systems, Inc.
HONESTY · INTEGRITY · SERVICE · SINCE 1958